




www.zc-rubber.com



zc rubber

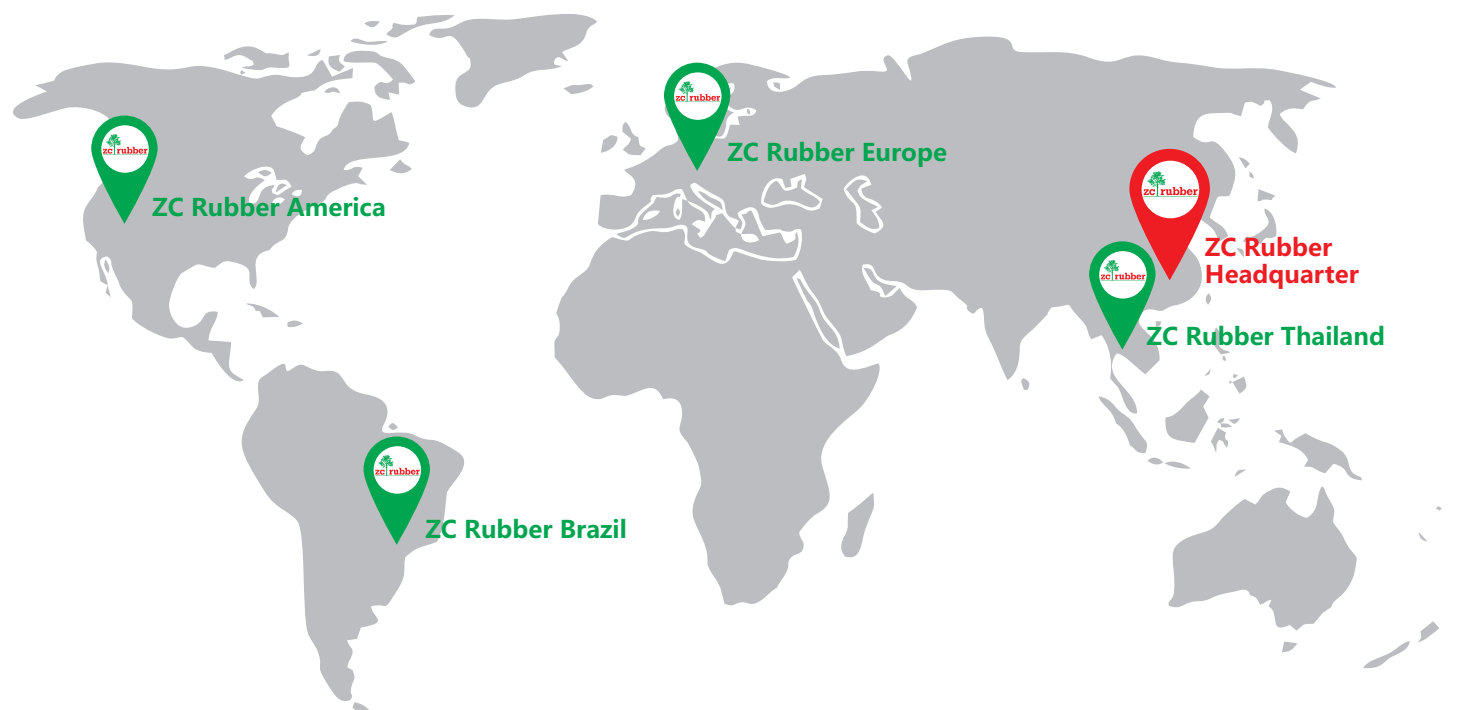

zc rubber



ZHONGCE RUBBER GROUP CO., LTD.



2017 TYRE CATALOGUE

TRUCK AND BUS



- A Company established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2016
- Sale revenue reached USD3.40 billion in Year 2015

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities. Meanwhile the quality control system approved by global tyre manufacturers and


international vehicle manufacturers will guarantee the safety and quality of ZC-Rubber tyres.

Today ZC-Rubber is expanding from a Chinese oriented company to a global tyre manufacturer. The subsidiaries located in Southeast Asia, North America, South America and Europe (coming soon) are serving customers without any difference of time and language. The newly established Thailand plant will produce suitable products for local and nearby markets. Safe and value will be the key supplied by ZC-Rubber, who will craft a better future together with partners and friends all over the world.

Manufacturing Bases




Advanced Production Facility

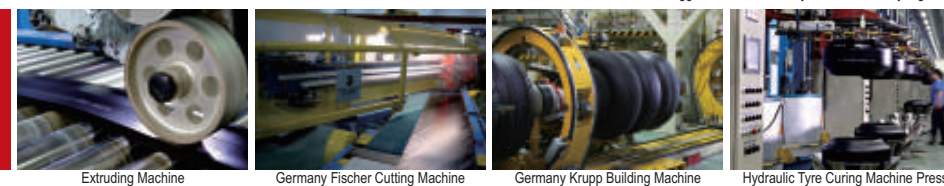

Strict Quality Inspection



R&D Center

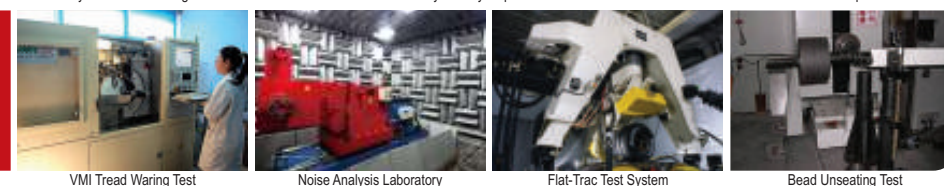



CONTENTS

TRUCK & BUS RADIAL

Long Haul	05 - 12
Regional	13 - 18
Mixed Service	19 - 21
Urban	22 - 23
Winter	24 - 25

EU TYRE LABEL

26

PRODUCT TECHNICAL DATA

27 - 30



 L Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance



- Premium five-rib tread provides outstanding handling for steer application
- Decoupling grooves prevent uneven tread wear and ensure long tread life for long distance travelling
- Wide and deep tread guarantee longer mileage with affordable cost and remarkable value



AS668

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	D	C	71	2
11R22.5	H/16	148/145L	D	C	71	2
12R22.5	J/18	152/149L	D	C	71	2
13R22.5	J/18	156/151K	D	C	71	2
295/80R22.5	H/16	150/147M	D	C	71	2
295/80R22.5	J/18	152/149M	D	C	71	2
315/80R22.5	J/18	154/151M(156/150L)	D	C	71	2



- Premium five-rib tread with various pitches to provide quiet and comfortable riding
- Stone ejection design reduces stone retention and casing penetration
- Computer aided casing design helps improve footprint for better mileage performance



AZ670

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	D	C	73	2
11R22.5	H/16	148/145M	D	C	73	2
12R22.5	J/18	152/149L	D	C	73	2
255/70R22.5	H/16	140/137M	D	C	73	2
295/80R22.5	H/16	150/147M	D	C	73	2
295/80R22.5	J/18	152/149M	D	C	73	2



L Long Haul



L Long Haul

M+S



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Stone ejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist treadsquirm and irregular wear forces for exceptionally long mileage



CR976A

SIZE	LR / PR	SERVICE INDEX			dB	
385/65R22.5	J/18	158L(160K)	C	C	73	2
385/65R22.5	L/20	160K(158L)	C	C	73	2
425/65R22.5	L/20	165K	C	C	73	2
445/65R22.5	L/20	169K	C	C	73	2
215/75R17.5	H/16	135/133J	D	C	73	2
225/70R19.5	G/14	128/126M	D	C	73	2
245/70R19.5	G/14	133/131M	D	C	73	2
245/70R19.5	H/16	136/134M	D	C	73	2
265/70R19.5	H/16	140/138M	D	C	73	2
265/70R19.5	J/18	143/141J	D	C	73	2
11R22.5	G/14	144/142M	D	C	73	2
11R22.5	H/16	148/145M	D	C	73	2
12R22.5	J/18	152/149L	D	C	73	2
255/70R22.5	H/16	140/137M	D	C	73	2
275/70R22.5	H/16	148/145M	D	C	73	2
275/80R22.5	H/16	149/146M	D	C	73	2
295/80R22.5	H/16	150/147M	C	C	73	2
295/80R22.5	J/18	152/149M	C	C	73	2
315/80R22.5	J/18	154/151M(156/150L)	D	C	73	2
315/80R22.5	L/20	157/154K	D	C	73	2



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Solid shoulder helps to minimize shoulder wear and improve cost per mile
- Advanced cool-running tread compounds reduces heat generated and increases irregular wear resistance resulting in higher mileage



CR966

SIZE	LR / PR	SERVICE INDEX			dB	
385/55R22.5	L/20	160K(158L)	C	B	72	2
11R22.5	G/14	144/142M	D	B	72	2
11R22.5	H/16	148/145M	D	B	72	2
12R22.5	J/18	152/149L	D	B	72	2
295/60R22.5	J/18	150/147L	C	B	72	2
315/60R22.5	J/18	152/148M	D	B	72	2
295/80R22.5	H/16	150/147M	D	B	72	2
295/80R22.5	J/18	152/149M	D	B	72	2
315/80R22.5	J/18	154/151M(156/150L)	D	B	72	2
315/80R22.5	L/20	157/154K	D	B	72	2

M+S



- Wider tread spreads load over a larger area, promoting long, even wear in steer and free-rolling wheel position
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads
- Decoupling tread design suitable for long-distance travelling



CR960

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142L	D	B	72	2
11R22.5	H/16	148/145M	D	B	72	2
295/80R22.5	H/16	150/147M	C	B	72	2
295/80R22.5	J/18	152/149M	C	B	72	2
315/80R22.5	J/18	154/151M(156/150L)	C	B	72	2
315/80R22.5	L/20	157/154K	C	B	72	2



L

Long Haul



L

Long Haul

M+S



- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



CR931

SIZE	LR / PR	SERVICE INDEX			dB	
385/65R22.5	J/18	158L(160K)	C	B	73	2
385/65R22.5	L/20	160K(158L)	C	B	73	2
425/65R22.5	L/20	165K	C	B	73	2
445/65R22.5	L/20	169K	C	B	73	2
12R22.5	J/18	152/149L	C	B	73	2
295/80R22.5	H/16	150/147M	C	B	73	2
295/80R22.5	J/18	152/149M	C	B	73	2
315/80R22.5	J/18	154/151M(156/150L)	C	B	73	2
315/80R22.5	L/20	157/154K	C	B	73	2

M+S



- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhanced damage resistance



AD733

SIZE	LR / PR	SERVICE INDEX			dB	
12R22.5	J/18	152/149L	E	C	72	2
295/80R22.5	H/16	150/147M	E	C	72	2
295/80R22.5	J/18	152/149M	E	C	72	2

M+S



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK performer



CM335/CM335A

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	E	C	74	2
11R22.5	H/16	148/145M	E	C	74	2
12R22.5(CM335A)	J/18	152/149L	D	C	74	2
295/60R22.5	J/18	150/147K	E	C	74	2
315/60R22.5	J/18	152/148M	E	C	74	2
315/70R22.5	L/20	154/150L	E	C	74	2
315/80R22.5	J/18	154/151M(156/150L)	E	B	74	2
315/80R22.5	L/20	157/154K	E	B	74	2

M+S



- Strong center tread blocks provide excellent all-weather traction
- Special designed tread grooves reduce stone retention for extended tyre life
- Advanced tread compound provides remarkable performance for long haul service



AD710A

SIZE	LR / PR	SERVICE INDEX			dB	
12R22.5	J/18	152/149L	E	C	75	2
315/80R22.5	J/18	154/151M(156/150L)	E	C	75	2
315/80R22.5	L/20	157/154K	E	C	75	2



L Long Haul



L Long Haul

M+S



- Value tyre suitable for drive axle
- Special tread compound and tyre casing offers good tyre mileage for price sensitive customers
- Computer designed tread guarantees good traction for highway service in all season conditions



AD153

SIZE	LR / PR	SERVICE INDEX			dB	
12R22.5	J/18	152/149L	E	C	73	2
275/80R22.5	H/16	149/146L	E	C	73	2
295/80R22.5	H/16	150/147M	E	C	73	2
295/80R22.5	J/18	152/149L	E	C	73	2
315/80R22.5	J/18	154/151M(156/153L)	E	C	73	2
315/80R22.5	L/20	157/154K	E	C	73	2

M+S



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT555

	LR / PR	SERVICE INDEX			dB	
435/50R19.5	L/20	160J(156K)	C	C	72	2
385/55R19.5	H/16	156J	C	C	72	2

M+S



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT556

SIZE	LR / PR	SERVICE INDEX			dB	
445/45R19.5	L/20	160J(156K)	C	C	72	2



- Wide base with high saturation for maximum mileage efficiency
- Optimised bead construction for better durability
- Scuff resistance ribs protect sidewall from curbing and cutting



AT559

SIZE	LR / PR	SERVICE INDEX			dB	
415/45R22.5	L/20	156K	D	C	73	2
385/65R22.5	J/18	158L(160K)	C	C	73	2
385/65R22.5	L/20	160K(158L)	C	C	73	2
425/65R22.5	L/20	165K	C	C	73	2
445/65R22.5	L/20	169K	C	C	73	2
12R22.5	J/18	152/149L	D	C	73	2
295/80R22.5	H/16	150/147M	C	C	73	2
295/80R22.5	J/18	152/149L	C	C	73	2
315/80R22.5	J/18	154/151M(156/150L)	C	C	73	2



- Super value tyre applicable for trailer axle
- Improved tread compound and tyre casing provide superb balance between cost and performance



AT161/AT161A

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	D	C	72	2
11R22.5	H/16	148/145M	D	C	72	2
12R22.5	J/18	152/149L	D	C	72	2
295/80R22.5	H/16	150/147M	D	C	72	2
295/80R22.5	J/18	152/149M	D	C	72	2
315/80R22.5(AT161A)	J/18	154/151M(156/153L)	D	C	72	2
315/80R22.5(AT161A)	L/20	157/154K	D	C	72	2



R

Regional

- Shorter jourey with frequent braking,accelerating and turing
- Improved road grip with maximum mileage
- Exceptional tough type



R

Regional



- Tread pattern provides extended even wear and offers excellent wet traction
- Advanced compound promotes mileage before removal for long tyre life



CR950

SIZE	LR / PR	SERVICE INDEX			dB	
8.5R17.5	F/12	121/120L	E	C	71	2
9.5R17.5	G/14	129/127L	D	C	71	2
9.5R17.5	H/16	143/141J	D	C	71	2
215/75R17.5	H/16	135/133J	E	C	71	2
8R22.5	G/14	130/128M	E	C	71	2
9R22.5	G/14	136/134M	D	C	71	2
10R22.5	H/16	144/142M	D	C	71	2



- Improved close shoulder helps to improve even wear resulting in long tread life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads



CR960A

SIZE	LR / PR	SERVICE INDEX			dB	
245/70R17.5	H/16	136/134M	D	C	71	2
245/70R17.5	J/18	143/141J	D	C	71	2
205/75R17.5	G/14	124/122M	D	B	71	2
215/75R17.5	H/16	135/133J	E	B	71	2
225/75R17.5	G/14	129/127M	E	B	71	2
235/75R17.5	G/14	132/130M	D	B	71	2
235/75R17.5	H/16	143/141J	D	C	71	2
8R19.5	F/12	124/122L	E	C	71	2
225/70R19.5	F/12	125/123M	D	C	71	2
245/70R19.5	G/14	133/131M	D	C	71	2
245/70R19.5	H/16	136/134M	D	C	71	2
285/70R19.5	H/16	146/144K	D	C	71	2
11R22.5	G/14	144/142L	E	C	71	2
11R22.5	H/16	148/145M	E	C	71	2
12R22.5	J/18	152/149L	E	C	71	2
315/70R22.5	L/20	154/150L	D	C	71	2
315/80R22.5	J/18	154/151M(156/150L)	E	C	71	2
315/80R22.5	L/20	157/154K	E	C	71	2



M+S



- All wheel position applicable for long or medium distance travel
- Special tread compounding ensuring longer wear life and service life
- Improved cut resistance helping to provide better tyre performance



MD752

SIZE	LR / PR	SERVICE INDEX			dB	
315/80R22.5	J/18	154/151M(156/150L)	D	C	72	2



- Four ribs ensure even wear and comfortable riding
- Siped zig-zag rib helps improve traction on wet and muddy surface
- Deep circumferential grooves improves efficient water evacuation, lateral stability, and long tyre life



CM922

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	D	C	74	3
11R22.5	H/16	148/145M	D	C	74	3
12R22.5	J/18	152/149L	D	C	74	3
295/80R22.5	H/16	150/147M	D	C	74	3
295/80R22.5	J/18	152/149M	D	C	74	3
315/80R22.5	J/18	154/151M	D	C	74	3
315/80R22.5	L/20	157/154K	D	C	74	3



- Designed for both steer and trailer axle
- Four ribs design provides excellent footprint and more contact on the road surface
- Special tyre casing and compound offer great value by longer mileage with less cost



AZ171

SIZE	LR / PR	SERVICE INDEX			dB	
12R22.5	J/18	152/149L	C	C	73	2
295/80R22.5	H/16	150/147M	C	C	73	2
295/80R22.5	J/18	152/149M	C	C	73	2
315/80R22.5	J/18	154/151M(156/153L)	C	C	73	2
315/80R22.5	L/20	157/154K	C	C	73	2

M+S



- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Open shoulder blocks improve traction on dry and wet road surface
- High blade density of tread design helps to provide even wearing
- Suitable for single axle vehicles



CM985

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142L	E	C	76	3
11R22.5	H/16	148/145L	E	C	76	3
12R22.5	J/18	152/149L	E	C	76	3
315/70R22.5	L/20	154/150L	E	C	76	3
315/80R22.5	J/18	154/151M(156/150L)	E	C	76	3
315/80R22.5	L/20	157/154K	E	C	76	3



R

Regional



R

Regional



M+S



- Traction block tread design for high drive wheel efficiency in all seasons
- Aggressive blading helps provide road-gripping traction
- Open shoulder produces powerful traction on wet and dry roads



CM986

SIZE	LR / PR	SERVICE INDEX			dB	
245/70R17.5	H/16	136/134M	E	C	73	2
245/70R17.5	J/18	143/141J	E	C	73	2
205/75R17.5	G/14	124/122M	E	C	73	2
215/75R17.5	H/16	135/133J	E	C	73	2
225/75R17.5	G/14	129/127M	E	C	73	2
235/75R17.5	G/14	132/130M	E	C	73	2
235/75R17.5	H/16	143/141J	E	C	73	2
225/70R19.5	F/12	125/123M	E	C	73	2
245/70R19.5	G/14	133/131M	E	C	73	2
245/70R19.5	H/16	136/134M	E	C	73	2
285/70R19.5	H/16	146/144K	E	C	73	2

M+S



- Value tyre suitable for drive axle
- Aggressive tread blocks with special tread compound provide good traction on paved roads for price-oriented customers
- Special tread design promises remarkable footprint and even wear to extend tread life



AD156

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142L	E	C	75	2
11R22.5	H/16	148/145L	E	C	75	2
12R22.5	J/18	152/149L	E	C	75	2
315/70R22.5	L/20	154/150L(152/148M)	E	C	75	2
295/80R22.5	H/16	150/147M	E	C	75	2
295/80R22.5	J/18	152/149M	E	C	75	2
315/80R22.5	J/18	156/153L(154/151M)	E	C	75	2
315/80R22.5	L/20	157/154K	E	C	75	2

M+S



- Strong tyre carcass offers lateral durability for regional application
- Good damage protection and even wear profile feature outstanding performance in all conditions
- Excellent traction and good handling



AT560

SIZE	LR / PR	SERVICE INDEX			dB	
385/65R22.5	J/18	158L(160K)	C	C	73	2
385/65R22.5	L/20	160K(158L)	C	C	73	2



- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



AZ676

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142M	E	C	71	2
11R22.5	H/16	148/145M	E	C	71	2
12R22.5	J/18	152/149L	D	C	71	2
295/80R22.5	H/16	150/147M	D	C	71	2
295/80R22.5	J/18	152/149L	D	C	71	2
315/80R22.5	J/18	154/151M(156/150L)	D	C	71	2



M

Mixed Service

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition




M

Mixed Service
On & Off

M+S



- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage

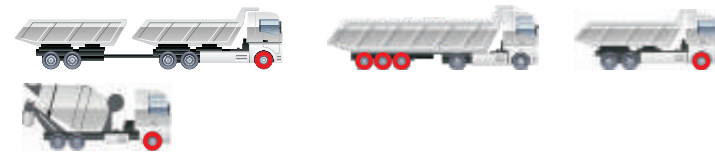

AT557

SIZE	LR / PR	SERVICE INDEX			dB	
385/65R22.5	J/18	158L(160K)	D	C	72	2
385/65R22.5	L/20	160K(158L)	D	C	72	2
425/65R22.5	L/20	165K	D	C	73	2
445/65R22.5	L/20	169K	D	C	73	2
265/70R19.5	J/18	143/141J	D	B	73	2
12R22.5	J/18	152/149L	D	B	73	2
255/70R22.5	H/16	140/137L	D	B	73	2
275/70R22.5	H/16	148/145L	D	B	73	2
315/80R22.5	J/18	154/151M(156/153L)	D	B	73	2
315/80R22.5	L/20	157/154K	D	B	73	2

M+S



- Drive axle tyre applicable for mud and sand terrain with short on high-way use
- Wide tread and open shoulder blocks help enhance traction and braking on rough roads with mud or gravel
- Special tread compounds resist chipping, chunking and tearing



CM913A

SIZE	LR / PR	SERVICE INDEX			dB	
12R22.5	J/18	152/149L	E	C	75	2
13R22.5	J/18	156/151K	E	C	75	2
315/80R22.5	J/18	154/151M(156/150L)	E	C	75	2
315/80R22.5	L/20	157/154K	E	C	75	2

**M****Mixed Service**
On & Off**M+S**

- Drive axle tyre applicable for rough road service
- Durable tyre casing and wide tread enhance tyre life
- Open lug design helps deliver super traction in wet and off-road conditions

**CM923**

SIZE	LR / PR	SERVICE INDEX			dB	
13R22.5	J/18	156/150K	D	C	75	2
315/80R22.5	J/18	154/151M(156/150L)	D	C	75	2
315/80R22.5	L/20	157/154K	D	C	75	2

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing

**CR926/B/D**

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5(CR926D)	G/14	144/142M	D	C	73	2
11R22.5(CR926D)	H/16	148/145M	D	C	73	2
12R22.5	J/18	152/149L	D	C	73	2
13R22.5	J/18	156/151K	D	C	73	2
295/80R22.5(CR926D)	H/16	150/147M	D	C	73	2
295/80R22.5(CR926D)	J/18	152/149L	D	C	73	2
315/80R22.5(CR926B)	J/18	154/151M(156/150L)	D	C	73	2
315/80R22.5(CR926B)	L/20	157/154K	D	C	73	2

**U****Urban**

- Frequent speed changes and turning
- Resistance to curb impact
- Excellent road grip and durable high mileage

**TRUCK & BUS RADIAL TYRES****TRUCK & BUS RADIAL TYRES**



U

Urban



M+S



- Five rib tread pattern provides uniform wear and excellent traction on wet and dry road.
- Deep and wide tread enhances mileage for exceptionally long tyre life
- Reinforced shoulder and steel sidewall help deliver long casing life and retreadability
- Sidewall protector ribs help resist sidewall damage from turning, backing and braking when used in urban neighborhoods.
- Cool-running compound delivers low rolloing resistance meaning more fuel efficiency



CR906

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142J	D	C	73	2
11R22.5	H/16	148/145J	D	C	73	2
275/70R22.5	H/16	148/145J(152/148F)	E	C	73	2
295/80R22.5	H/16	150/147M	D	C	73	2
295/80R22.5	J/18	152/149L	D	C	73	2



W

Winter





W Winter

M+S



NEW

- Wide and deep circumferential grooves enhances removal of snow and ice
- Specific tread compound keep rubber softness in low temperture with good performance
- Wide tread with advanced block and sipe design provides extra traction for snow and ice road conditions



NS785

SIZE	LR / PR	SERVICE INDEX			dB	
315/70R22.5	L/20	154/150K(152/148L)	E	C	75	2
315/80R22.5	J/18	154/151M(156/153L)	E	C	75	2
315/80R22.5	L/20	157/154K	E	C	75	2

M+S



NEW

- Wide open shoulder deliver additional traction without compromising tread life
- Specific tread compound keep rubber softness in low temperture with good performance
- Studable tread design provides extra traction for snow and ice road conditions



ND783

SIZE	LR / PR	SERVICE INDEX			dB	
315/70R22.5	L/20	154/150K(152/148L)	E	C	76	2
315/80R22.5	J/18	156/153K(154/151L)	E	C	76	2
315/80R22.5	L/20	157/154 J	E	C	76	2

M+S



- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



NZ782

SIZE	LR / PR	SERVICE INDEX			dB	
11R22.5	G/14	144/142L	E	C	75	2
11R22.5	H/16	148/145L	E	C	75	2

www.zc-rubber.com



EU TYRE LABEL

In 2012 the European Union introduced a new tyre label, in order to provide standardised information on 3 specific performances; fuel efficiency, wet grip and external rolling noise.

Tyre labelling for passenger cars and light trucks took effect from November 2012, for tyres on sale in the EU under European Regulation (EC/No. 1222/2009) which were manufactured after 1 st July 2012.

The label is accompanied on the actual tyre and gives consumers useful information to assist them when purchasing new tyres.


On the right you can find an example of the new EU tyre label. These graphics on the label are similar as those already used for household appliances and more recently new cars.

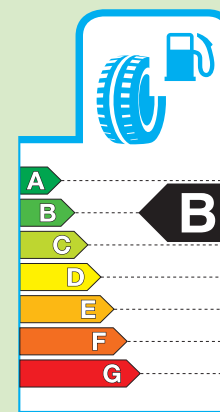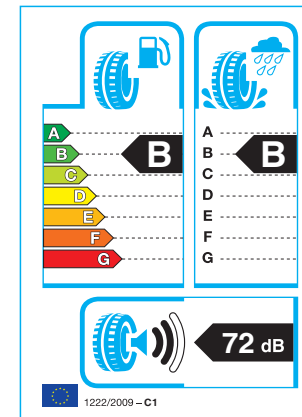

Rolling Resistance (Fuel Efficiency)

Rolling resistance is one of the main resistive forces on a vehicle, which acts as an opposite force to the direction in which the tyre is rolling. The rolling tyre deforms and dissipates energy. The tyre whose rolling resistance is greater, requires more fuel to move the vehicle forward. Therefore rolling resistance influences fuel consumption and the environment directly.

On the top left of the label, this shows 7 classes which range from A (most efficient) to G (least efficient), the grading indicates the tyre's contribution to fuel efficiency and CO₂ emissions.

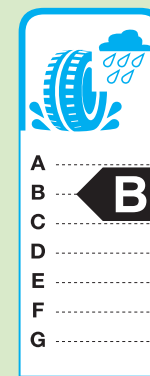

Wet Grip (Braking Performance)

Wet grip is one of the most important safety aspects of a tyre. The tyres with excellent grip on wet surfaces have shorter braking distance when driving in rainy weather.

There are other important parameters which are also related to safety. However, consumers will be able to check and select for themselves their preferred performance.

On the top right of the label, wet grip is also expressed in classes ranging from A (highest performance) to G (lowest performance).



External Noise

Traffic noise is a major factor of nuisance and a very relevant environmental issue. On the lower part of the label, this indicates the level of exterior tyre noise from the vehicle (not the internal noise heard by the driver), expressed in decibels. The grading indicates the tyre's contribution to traffic noise and the environment. The label displays sound waves and corresponding levels ranging from 1 (least noise) to 3 (highest noise)

1 sound wave

The best noise level performance.(3 dB below the future European limit*)

2 sound waves

The average performance. (Already compliant with the future European limit*)

3 sound waves

The weakest performance. (Compliant with the current European limit)



EU Tyre Label
Icon Explanation

⊙ = Fuel Efficiency Class on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011
◆ = Wet Grip Class on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011
◀ dB = External Rolling Noise Class and Measured Value (dB) on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011

PRODUCT TECHNICAL DATA

⦿ = Fuel Efficiency Class ● = Wet Grip Class

Size	Pattern	LR/PR	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure				⦿	●	dB	◀
								Single (kg)	Single (kPa)	Dual (kg)	Dual (kPa)				
Wide Base Truck Tyres															
445/45R19.5	AT556	L/20	160J(156K)	14.3	15.00	895	446	4500	900	-	-	C	C	72	2
435/50R19.5	AT555	L/20	160J(156K)	13.5	14.00	931	438	4500	900	-	-	C	C	72	2
415/45R22.5	AT559	L/20	156K	15.5	14.00	946	416	4000	800	-	-	D	C	73	2
385/55R22.5	CR966	L/20	160K(158L)	15.0	12.25	996	386	4500	900	-	-	C	B	72	2
385/55R19.5	AT555	H/16	156J	15.0	12.25	919	386	4000	900	-	-	C	C	72	2
385/65R22.5	CR976A	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-	C	C	73	2
385/65R22.5	CR931	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-	C	B	73	2
385/65R22.5	AT559	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-	C	C	73	2
385/65R22.5	AT560	J/18	158L(160K)	16.0	11.75	1072	389	4250	850	-	-	C	C	73	2
385/65R22.5	AT557	J/18	158L(160K)	18.0	11.75	1072	389	4250	850	-	-	D	C	72	2
385/65R22.5	CR976A	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-	C	C	73	2
385/65R22.5	CR931	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-	C	B	73	2
385/65R22.5	AT559	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-	C	C	73	2
385/65R22.5	AT560	L/20	160K(158L)	16.0	11.75	1072	389	4500	900	-	-	C	C	73	2
385/65R22.5	AT557	L/20	160K(158L)	18.0	11.75	1072	389	4500	900	-	-	D	C	72	2
425/65R22.5	CR976A	L/20	165K	15.0	13.00	1124	430	5150	830	-	-	C	C	73	2
425/65R22.5	CR931	L/20	165K	15.0	13.00	1124	430	5150	830	-	-	C	B	73	2
425/65R22.5	AT559	L/20	165K	15.5	13.00	1124	430	5150	830	-	-	C	C	73	2
425/65R22.5	AT557	L/20	165K	18.0	13.00	1124	430	5150	830	-	-	D	C	73	2
445/65R22.5	CR976A	L/20	169K	15.0	13.00	1150	444	5800	900	-	-	C	C	73	2
445/65R22.5	CR931	L/20	169K	15.0	13.00	1150	444	5800	900	-	-	C	B	73	2
445/65R22.5	AT559	L/20	169K	15.5	13.00	1150	444	5800	900	-	-	C	C	73	2
445/65R22.5	AT557	L/20	169K	18.0	13.00	1150	444	5800	900	-	-	D	C	73	2
Light Truck Tyres															
8.5R17.5	CR950	F/12	121/120L	12.0	6.00	802	215	1450	625	1400	625	E	C	71	2
9.5R17.5	CR950	G/14	129/127L	13.0	6.75	842	240	1850	750	1750	750	D	C	71	2
9.5R17.5	CR950	H/16	143/141J	13.0	6.75	842	240	2725	875	2575	875	D	C	71	2
245/70R17.5	CR960A	H/16	136/134M	13.0	7.50	789	248	2240	850	2120	850	D	C	71	2
245/70R17.5	CM986	H/16	136/134M	15.0	7.50	789	248	2240	850	2120	850	E	C	73	2
245/70R17.5	CR960A	J/18	143/141J	13.0	7.50	789	248	2725	875	2575	875	D	C	71	2
245/70R17.5	CM986	J/18	143/141J	15.0	7.50	789	248	2725	875	2575	875	E	C	73	2
205/75R17.5	CR960A	G/14	124/122M	12.0	6.00	753	205	1600	750	1500	750	D	B	71	2
205/75R17.5	CM986	G/14	124/122M	14.0	6.00	753	205	1600	750	1500	750	E	C	73	2
215/75R17.5	CR976A	H/16	135/133J	12.5	6.00	767	211	2180	850	2060	850	D	C	73	2
215/75R17.5	CR950	H/16	135/133J	13.0	6.00	767	211	2180	850	2060	850	E	C	71	2
215/75R17.5	CR960A	H/16	135/133J	12.5	6.00	767	211	2180	850	2060	850	E	B	71	2
215/75R17.5	CM986	H/16	135/133J	14.5	6.00	767	211	2180	850	2060	850	E	C	73	2
225/75R17.5	CR960A	G/14	129/127M	12.5	6.75	783	226	1850	725	1750	725	E	B	71	2
225/75R17.5	CM986	G/14	129/127M	14.5	6.75	783	226	1850	725	1750	725	E	C	73	2
235/75R17.5	CR960A	G/14	132/130M	13.3	6.75	797	233	2000	775	1900	775	D	B	71	2
235/75R17.5	CM986	G/14	132/130M	15.4	6.75	797	233	2000	775	1900	775	E	C	73	2
235/75R17.5	CR960A	H/16	143/141J	13.3	6.75	797	233	2725	875	2575	875	D	C	71	2
235/75R17.5	CM986	H/16	143/141J	15.4	6.75	797	233	2725	875	2575	875	E	C	73	2
8R19.5	CR960A	F/12	124/122L	13.0	6.00	859	203	1600	760	1500	760	E	C	71	2
225/70R19.5	CR960A	F/12	125/123M	13.0	6.75	811	226	1650	660	1550	660	D	C	71	2
225/70R19.5	CM986	F/12	125/123M	15.0	6.75	811	226	1650	660	1550	660	E	C	73	2
225/70R19.5	CR976A	G/14	128/126M	13.0	6.75	811	226	1800	760	1700	760	D	C	73	2
245/70R19.5	CR976A	G/14	133/131M	13.0	7.50	839	248	2060	760	1950	760	D	C	73	2
245/70R19.5	CR960A	G/14	133/131M	13.0	7.50	839	248	2060	760	1950	760	D	C	71	2
245/70R19.5	CM986	G/14	133/131M	15.4	7.50	839	248	2060	760	1950	760	E	C	73	2
245/70R19.5	CR976A	H/16	136/134M	13.0	7.50	839	248	2240	830	2120	830	D	C	73	2
245/70R19.5	CR960A	H/16	136/134M	13.0	7.50	839	248	2240	830	2120	830	D	C	71	2

dB = See page 26 for detailed information ◀ = External Rolling Noise Class and Measured Value

Size	Pattern	LR/PR	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure				⦿	●	dB	◀
								Single (kg)	Single (kPa)	Dual (kg)	Dual (kPa)				
245/70R19.5	CM986	H/16	136/134M	15.4	7.50	839	248	2240	830	2120	830	E	C	73	2
265/70R19.5	CR976A	H/16	140/138M	14.0	7.50	867	262	2500	775	2360	775	D	C	73	2
265/70R19.5	CR976A	J/18	143/141J	14.0	7.50	867	262	2725	850	2575	850	D	C	73	2
265/70R19.5	AT557	J/18	143/141J	16.5	7.50	867	262	2725	850	2575	850	D	B	73	2
285/70R19.5	CR960A	H/16	146/144K	14.5	8.25	895	283	3000	850	2800	850	D	C	71	2
285/70R19.5	CM986	H/16	146/144K	16.0	8.25	895	283	3000	850	2800	850	E	C	73	2
Medium & Heavy Truck Tyres															
8R22.5	CR950	G/14	130/128M	13.5	6.00	935	203	1900	830	1800	830	E	C	71	2
9R22.5	CR950	G/14	136/134M	14.0	6.75	974	229	2240	830	2120	830	D	C	71	2
10R22.5	CR950	H/16	144/142M	15.0	7.50	1019	254	2800	900	2650	900	D	C	71	2
11R22.5	AS668	G/14	144/142M	17.0	8.25	1054	279	2800	720	2650	720	D	C	71	2
11R22.5	AZ670	G/14	144/142M	16.0	8.25	1054	279	2800	720	2650	720	D	C	73	2
11R22.5	CR976A	G/14	144/142M	15.5	8.25	1054	279	2800	720	2650	720	D	C	73	2
11R22.5	CR966	G/14	144/142M	15.0	8.25	1054	279	2800	720	2650	720	D	B	72	2
11R22.5	CR960	G/14	144/142L	14.2	8.25	1054	279	2800	720	2650	720	D	B	72	2
11R22.5	CM335/A	G/14	144/142M	20.6	8.25	1065	279	2800	720	2650	720	E	C	74	2
11R22.5	AT161	G/14	144/142M	15.5	8.25	1054	279	2800	720	2650	720	D	C	72	2
11R22.5	CR960A	G/14	144/142L	14.2	8.25	1054	279	2800	720	2650	720	E	C	71	2
11R22.5	CM922	G/14	144/142M	16.0	8.25	1054	279	2800	720	2650	720	D	C	74	3
11R22.5	CM985	G/14	144/142L	19.0	8.25	1065	279	2800	720	2650	720	E	C	76	3
11R22.5	AD156	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720	E	C	75	2
11R22.5	AZ676	G/14	144/142M	16.8	8.25	1054	279	2800	720	2650	720	E	C	71	2
11R22.5	CR926D	G/14	144/142M	16.8	8.25	1054	279	2800	720	2650	720	D	C	73	2
11R22.5	CR906	G/14	144/142J	20.0	8.25	1065	279	2800	720	2650	720	D	C	73	2
11R22.5	AS668	H/16	148/145L	17.0	8.25	1054	279	3150	850	2900	850	D	C	71	2
11R22.5	AZ670	H/16	148/145M	16.0	8.25	1054	279	3150	850	2900	850	D	C	73	2
11R22.5	CR976A	H/16	148/145M	15.5	8.25	1054	279	3150	850	2900	850	D	C	73	2
11R22.5	CR966	H/16	148/145M	15.0	8.25	1054	279	3150	850	2900	850	D	B	72	2
11R22.5	CR960	H/16	148/145M	14.2	8.25	1054	279	3150	850	2900	850	D	B	72	2
11R22.5	CM335/A	H/16	148/145M	20.6	8.25	1065	279	3150	850	2900	850	E	C	74	2
11R22.5	AT161	H/16	148/145M	15.5	8.25	1054	279	3150	850	2900	850	D	C	72	2
11R22.5	CR960A	H/16	148/145M	14.2	8.25	1054	279	3150	850	2900	850	E	C	71	2
11R22.5	CM922	H/16	148/145M	16.0	8.25	1054	279	3150	850	2900	850	D	C	74	3
11R22.5	CM985	H/16	148/145L	19.0	8.25	1065	279	3150	850	2900	850	E	C	76	3
11R22.5	AD156	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850	E	C	75	2
11R22.5	AZ676	H/16	148/145M	16.8	8.25	1054	279	3150	850	2900	850	E	C	71	2
11R22.5	CR926D	H/16	148/145M	16.8	8.25	1054	279	3150	850	2900	850	D	C	73	2
11R22.5	CR906	H/16	148/145J	20.0	8.25	1065	279	3150	850	2900	850	D	C	73	2
12R22.5	AS668	J/18	152/149L	17.5	9.00	1085	300	3550	930	3250	930	D	C	71	2
12R22.5	AZ670	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930	D	C	73	2
12R22.5	CR976A	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930	D	C	73	2
12R22.5	CR966	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930	D	B	72	2
12R22.5	CR931	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930	C	B	73	2
12R22.5	AD733	J/18	152/149L	23.0	9.00	1096	300	3550	930	3250	930	E	C	72	2
12R22.5	CM335A	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930	D	C	74	2
12R22.5	AD710A	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930	E	C	75	2
12R22.5	AD153	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930	E	C	73	2
12R22.5	AT559	J/18	152/149L	16.5	9.00	1085	300	3550	930	3250	930	D	C	73	2
12R22.5	AT161	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930	D	C	72	2
12R22.5	CR960A	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930	E	C	71	2
12R22.5	CM922	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930	D	C	74	3
12R22.5	AZ171	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930	C	C	73	2
12R22.5	CM985	J/18	152/149L	22.0	9.00	1096	300	3550	930	3250	930	E	C	76	3

PRODUCT TECHNICAL DATA

⦿ = Fuel Efficiency Class ● = Wet Grip Class

Size	Pattern	LR/PR	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure				⦿	●	dB	◀
12R22.5	AD156	J/18	152/149L	19.0	9.00	1085	300	3550	930	3250	930	E	C	75	2
12R22.5	AZ676	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930	D	C	71	2
12R22.5	AT557	J/18	152/149L	17.5	9.00	1085	300	3550	930	3250	930	D	B	73	2
12R22.5	CM913A	J/18	152/149L	20.6	9.00	1085	300	3550	930	3250	930	E	C	75	2
12R22.5	CR926	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930	D	C	73	2
13R22.5	AS668	J/18	156/151K	18.0	9.75	1124	320	4000	875	3450	875	D	C	71	2
13R22.5	CM923	J/18	156/150K	20.0	9.75	1124	320	4000	875	3350	875	D	C	75	2
13R22.5	CR926	J/18	156/151K	16.0	9.75	1124	320	4000	875	3450	875	D	C	73	2
13R22.5	CM913A	J/18	156/151K	20.0	9.75	1124	320	4000	875	3450	875	E	C	75	2
295/60R22.5	CR966	J/18	150/147L	15.0	9.00	926	292	3350	900	3075	900	C	B	72	2
295/60R22.5	CM335	J/18	150/147K	19.0	9.00	926	292	3350	900	3075	900	E	C	74	2
315/60R22.5	CR966	J/18	152/148M	15.0	9.75	950	313	3550	900	3150	900	D	B	72	2
315/60R22.5	CM335	J/18	152/148M	18.0	9.75	950	313	3550	900	3150	900	E	C	74	2
255/70R22.5	AZ670	H/16	140/137M	15.0	7.50	930	255	2500	830	2300	830	D	C	73	2
255/70R22.5	CR976A	H/16	140/137M	14.5	7.50	930	255	2500	830	2300	830	D	C	73	2
255/70R22.5	AT557	H/16	140/137L	17.5	7.50	936	255	2500	830	2300	830	D	B	73	2
275/70R22.5	CR976A	H/16	148/145M	14.0	8.25	958	276	3150	900	2900	900	D	C	73	2
275/70R22.5	AT557	H/16	148/145L	18.0	8.25	958	276	3150	900	2900	900	D	B	73	2
275/70R22.5	CR906	H/16	148/145J(152/148F)	20.0	8.25	964	276	3150	900	2900	900	E	C	73	2
315/70R22.5	CM335/A	L/20	154/150L	18.0	9.00	1020	312	3750	900	3350	900	E	C	74	2
315/70R22.5	CR960A	L/20	154/150L	15.0	9.00	1014	312	3750	900	3350	900	D	C	71	2
315/70R22.5	CM985	L/20	154/150L	20.6	9.00	1020	312	3750	900	3350	900	E	C	76	3
315/70R22.5	AD156	L/20	154/150L(152/148M)	18.0	9.00	1020	312	3750	900	3350	900	E	C	75	2
275/80R22.5	CR976A	H/16	149/146M	14.0	8.25	1012	276	3250	850	3000	850	D	C	73	2
275/80R22.5	AD153	H/16	149/146L	17.0	8.25	1012	276	3250	850	3000	850	E	C	73	2
295/80R22.5	AS668	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	D	C	71	2
295/80R22.5	AZ670	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	D	C	73	2
295/80R22.5	CR976A	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830	C	C	73	2
295/80R22.5	CR966	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830	D	B	72	2
295/80R22.5	CR960	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830	C	B	72	2
295/80R22.5	CR931	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830	C	B	73	2
295/80R22.5	AD733	H/16	150/147M	20.6	9.00	1050	298	3350	830	3075	830	E	C	72	2
295/80R22.5	AD153	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830	E	C	73	2
295/80R22.5	AT559	H/16	150/147M	15.5	9.00	1044	298	3350	830	3075	830	C	C	73	2
295/80R22.5	AT161	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830	D	C	72	2
295/80R22.5	CM922	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	D	C	74	3
295/80R22.5	AZ171	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	C	C	73	2
295/80R22.5	AD156	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830	E	C	75	2
295/80R22.5	AZ676	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	D	C	71	2
295/80R22.5	CR926D	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830	D	C	73	2
295/80R22.5	CR906	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830	D	C	73	2
295/80R22.5	AS668	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900	D	C	71	2
295/80R22.5	AZ670	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900	D	C	73	2
295/80R22.5	CR976A	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900	C	C	73	2
295/80R22.5	CR966	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900	D	B	72	2
295/80R22.5	CR960	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900	C	B	72	2
295/80R22.5	CR931	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900	C	B	73	2
295/80R22.5	AD733	J/18	152/149M	20.6	9.00	1050	298	3550	900	3250	900	E	C	72	2
295/80R22.5	AD153	J/18	152/149L	19.0	9.00	1050	298	3550	900	3250	900	E	C	73	2
295/80R22.5	AT559	J/18	152/149L	15.5	9.00	1044	298	3550	900	3250	900	C	C	73	2
295/80R22.5	AT161	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900	D	C	72	2
295/80R22.5	CM922	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900	D	C	74	3
295/80R22.5	AZ171	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900	C	C	73	2

dB = See page 26 for detailed information ◀ = External Rolling Noise Class and Measured Value

Size	Pattern	LR/PR	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure				⦿		●	dB	◀
								Single (kg)	Single (kPa)	Dual (kg)	Dual (kPa)					
295/80R22.5	AD156	J/18	152/149M	19.0	9.00	1050	298	3550	900	3250	900	E	C	75	2	
295/80R22.5	AZ676	J/18	152/149L	16.0	9.00	1044	298	3550	900	3250	900	D	C	71	2	
295/80R22.5	CR926D	J/18	152/149L	16.0	9.00	1044	298	3550	900	3250	900	D	C	73	2	
295/80R22.5	CR906	J/18	152/149L	19.0	9.00	1050	298	3550	900	3250	900	D	C	73	2	
315/80R22.5	AS668	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	830	3450	830	D	C	71	2	
315/80R22.5	CR976A	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830	D	C	73	2	
315/80R22.5	CR966	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830	D	B	72	2	
315/80R22.5	CR960	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830	C	B	72	2	
315/80R22.5	CR931	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830	C	B	73	2	
315/80R22.5	CM335	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830	E	B	74	2	
315/80R22.5	AD710A	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830	E	C	75	2	
315/80R22.5	AD153	J/18	154/151M(156/153L)	20.0	9.00	1082	312	3750	830	3450	830	E	C	73	2	
315/80R22.5	AT559	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830	C	C	73	2	
315/80R22.5	CR960A	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830	E	C	71	2	
315/80R22.5	MD752	J/18	154/151M(156/150L)	18.0	9.00	1082	312	3750	830	3450	830	D	C	72	2	
315/80R22.5	CM922	J/18	154/151M	16.5	9.00	1076	312	3750	830	3450	830	D	C	74	3	
315/80R22.5	AZ171	J/18	154/151M(156/153L)	16.0	9.00	1076	312	3750	830	3450	830	C	C	73	2	
315/80R22.5	CM985	J/18	154/151M(156/150L)	22.0	9.00	1082	312	3750	830	3450	830	E	C	76	3	
315/80R22.5	AD156	J/18	156/153L(154/151M)	19.0	9.00	1082	312	4000	850	3650	850	E	C	75	2	
315/80R22.5	AZ676	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830	D	C	71	2	
315/80R22.5	AT557	J/18	154/151M(156/153L)	17.5	9.00	1076	312	3750	830	3450	830	D	B	73	2	
315/80R22.5	CM913A	J/18	154/151M(156/150L)	19.0	9.00	1082	312	3750	830	3450	830	E	C	75	2	
315/80R22.5	CM923	J/18	154/151M(156/150L)	20.0	9.00	1082	312	3750	830	3450	830	D	C	75	2	
315/80R22.5	CR926B	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	830	3450	830	D	C	73	2	
315/80R22.5	AT161A	J/18	154/151M(156/153L)	15.5	9.00	1076	312	3750	830	3450	830	D	C	72	2	
315/80R22.5	CR976A	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900	D	C	73	2	
315/80R22.5	CR966	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900	D	B	72	2	
315/80R22.5	CR960	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900	C	B	72	2	
315/80R22.5	CR931	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900	C	B	73	2	
315/80R22.5	CM335	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900	E	B	74	2	
315/80R22.5	AD710A	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900	E	C	75	2	
315/80R22.5	AD153	L/20	157/154K	20.0	9.00	1082	312	4125	900	3750	900	E	C	73	2	
315/80R22.5	CR960A	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900	E	C	71	2	
315/80R22.5	CM922	L 20	157/154K	16.5	9.00	1076	312	4125	900	3750	900	D	C	74	3	
315/80R22.5	AZ171	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900	C	C	73	2	
315/80R22.5	CM985	L/20	157/154K	22.0	9.00	1082	312	4125	900	3750	900	E	C	76	3	
315/80R22.5	AD156	L/20	157/154K	19.0	9.00	1082	312	4125	900	3750	900	E	C	75	2	
315/80R22.5	AT557	L/20	157/154K	17.5	9.00	1076	312	4125	900	3750	900	D	B	73	2	
315/80R22.5	CM913A	L/20	157/154K	19.0	9.00	1082	312	4125	900	3750	900	E	C	75	2	
315/80R22.5	CM923	L/20	157/154K	20.0	9.00	1082	312	4125	900	3750	900	D	C	75	2	
315/80R22.5	CR926B	L/20	157/154K	16.5	9.00	1076	312	4125	900	3750	900	D	C	73	2	
315/80R22.5	AT161A	L/20	157/154K	15.5	9.00	1076	312	4125	900	3750	900	D	C	72	2	
Winter Tyres																
11R22.5	NZ782	G/14	144/142L	19.6	8.25	1054	279	2800	720	2650	720	E	C	75	2	
11R22.5	NZ782	H/16	148/145L	19.6	8.25	1054	279	3150	850	2900	850	E	C	75	2	
315/70R22.5	NS785	L/20	154/150K(152/148L)	17.0	9.00	1020	312	3750	900	3350	900	E	C	75	2	
315/70R22.5	ND783	L/20	154/150K(152/148L)	19.0	9.00	1020	312	3750	900	3350	900	E	C	76	2	
315/80R22.5	NS785	J/18	154/151M(156/153L)	18.0	9.00	1076	312	3750	830	3450	830	E	C	75	2	
315/80R22.5	ND783	J/18	156/153K(154/151L)	21.0	9.00	1082	312	4000	850	3650	850	E	C	76	2	
315/80R22.5	NS785	L/20	157/154K	18.0	9.00	1076	312	4125	900	3750	900	E	C	75	2	
315/80R22.5	ND783	L/20	157/154J	21.0	9.00	1082	312	4125	900	3750	900	E	C	76	2	